


Self priming centrifugal PLSH



Ideal for lawn sprinkling systems, irrigation and other areas where high capacity self-priming pumps are required.

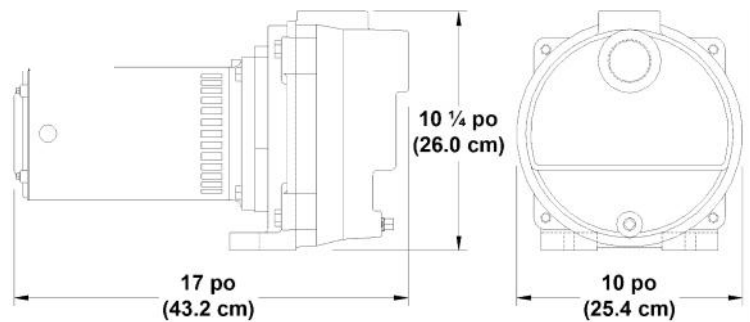

Part number	Model	Motor HP (kW)	Suction Inch (mm)	Discharge Inch (mm)	Shipping weight lbs (kg)
335-0075	PLSH-75	3/4 (.55)	1 1/2" (38.10)	1 1/2" (38.10)	63 (29)
335-0100	PLSH-100	1.0 (.75)	1 1/2" (38.10)	1 1/2" (38.10)	65 (30)
335-0150	PLSH-150	1.5 (1.1)	1 1/2" (38.10)	1 1/2" (38.10)	70 (32)
335-0200	PLSH-200	2.0 (1.5)	1 1/2" (38.10)	1 1/2" (38.10)	75 (34)

FEATURES

- On site maintenance possible due to an easy access to internal parts.
- Maximum water volume in pump housing assures easy and fast priming.
- Unique design of housing and polycarbonate + fiber impeller helps provide high heads.
- Hard to unprime even with bubbles in the water.
- Long life assured by non-corrosive paint and strong construction.

CHARACTERISTICS

- Single phase motor, **square flange**, 60 Hz, 115/230 Volts, capacitor starting, automatic thermal protection
- Priming up to 25 feet (7.62 m)

All pumps are tested at our factory